


Fitting instructions

Batwing® seals

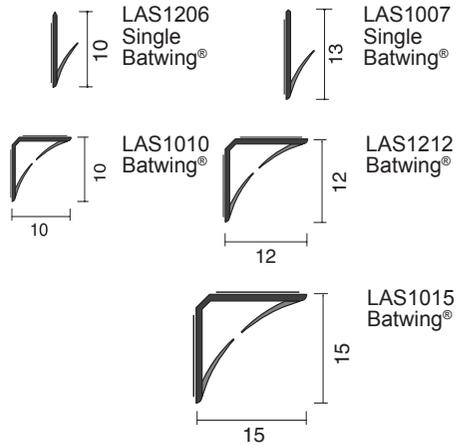

Tools required

Tape measure
Pencil or marker
Mitre saw or snips

For further information about our products please visit our website

www.lorientgroup.com

t: +44 (0)1626 834252
f: +44 (0)1626 833166
e: mktg@lorientuk.com

Instructions

Please note: Batwing® needs to have a 2 - 4 mm gap between the door and the door stop to enable the door to close. Tight gaps will dislodge the seal from its position.

It is essential to ensure that freshly painted surfaces are fully dry and cured before commencing installation.

1. Remove Batwing® from packaging and trim to length using snips.
2. Peel adhesive from both legs of the Batwing® approx 100mm.
3. Mount in the top corner, using a jointing method as tight as possible to ensure continuity of seal.

Please note: Recommendations as to methods, use of materials and construction details are based on the experience and knowledge of Lorient and are given in good faith as a general guide and service to designers, contractors and manufacturers. Lorient reserves the right to make alterations or delete installation detail without prior notice.



Positive pressure tested gasketing materials for fire doors for application to hollow-metal-type fire doors rated up to 3 hours & wood-type fire doors rated up to 1-1.5 hours.

CATEGORY J – Doors – gasketing that has been tested on a positive pressure fire door & frame but is not required for the door to obtain its fire rating. Category J gasketing does not negatively affect the rating on a positive pressure door.

4. Run finger down centre of the profile pushing it into the centre of the reveal.
5. Pull adhesive backing strips off both legs a little at a time, progressively pushing Batwing® into place.

Please note: For single Batwing® there are two preferred positions in the door frame, the flexible seal to be in the same alignment as the double Batwing®.

Important

The product will not adhere to surfaces where silicone sealant has been applied.



Other Lorient products:

Acoustic, smoke & fire seals
Fire resistant glazing systems
Fire resistant door hardware
Air transfer grilles/ dampers
Georgia Pacific doors