

BS 5 Lever & 5 Lever Mortice

2200S

BS 5 Lever StrongBOLT



ASSA ABLOY

Application:


- For timber doors hinged on the left or right
- Suitable for doors up to 54mm thick

Specification:

- Deadbolt locked or unlocked by the key from either side
- 20mm deadbolt for secure positive deadlocking and additional resistance against attack
- 2200S can be keyed alike with 2100S
- Anti-pick, anti-saw and anti-drill security features for resistance against attack
- Chamfered bolt design increases the performance of the lock under side load testing; The chamfer of the bolt also makes drilling attack more difficult
- Supplied with covered escutcheon to match forend
- Radius inner forend for ease of installation
- Can be installed in the many UK mortices without the need for additional carpentry or spoiling the edge of the door
- Anti-pick and keyhole protection prevents forced entry by picking
- Hardened steel pins provide resistance to attack from sawing
- Case Size: 67mm (2.5") or 79.5mm (3")
- Backset: 45mm or 57.5mm
- Case: Steel, red powder coat
- Forend: Stainless steel or brass
- Striking Plate: Finished to match forend
- Faceplate: Supplied with square faceplate which covers a radius inner forend
- Deadbolt: Brass with hardened steel rollers
- Latch Bolt: n/a
- Follower: n/a
- Rebate Kit: 2100REB 13mm (0.5")
- Keying Groups: May be supplied to pass or differ. Supplied with 2 steel nickel plated keys
- Key Blank Number: KB430
- **NB:** Not suitable for master keying
- Packaging: Individually boxed, supplied in outer boxes of 10

Finish:

- SC - Satin Chrome
- PL - Satin Brass

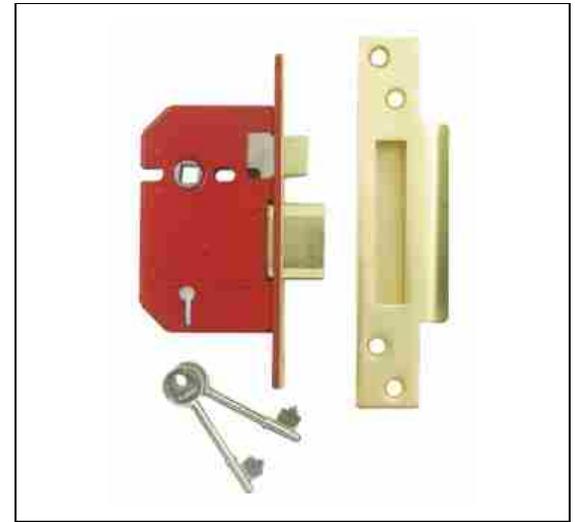

Standards:

- Tested to BS3621:2007

2	H	4	1	0	F	7	K	D	1	B
---	---	---	---	---	---	---	---	---	---	---
- EN 1634-1 assessed for use on 60 minutes timber fire doors



BS 5 Lever & 5 Lever Mortice

2200S

BS 5 Lever StrongBOLT



ASSA ABLOY

Technical
Design:

