

British Standard Anti Bump Euro Profile Cylinders



BS EN 1303:2015 TS007-1:2014+A2:2018

Double



Thumbturn



Single



Features

- High performance euro profile locking cylinder guaranteed for ease of application and long term trouble free performance
- Designed with 6 pin 'bumping' resistance security, the anti pick, anti plug and anti drill features means the cylinder offers excellent resistance to forced entry
- Meets the requirements of PAS 24 as part of a compliant doorset
- Independently tested to meet the latest British Standards BS EN 1303:2015 for security and awarded a BS Kitemark
- High physical quality
- Hardened pins for drill resistance
- 100,000 differs
- Available in Single, Double, Thumbturn and Keyed Alike
- Each cylinder is supplied with 3 keys

British Standard Anti Bump Euro Profile Cylinders

Ordering Details

Single

Dimensions			No. of Pins	Finish	Part No.
A	B	C			

Please contact the sales office for part codes

Double

Dimensions			No. of Pins	Finish	Part No.
A	B	C			

35	35	70	6	Brass	BS-L-3535-31
35	35	70	6	Satin	BS-L-3535-51
35	45	80	6	Brass	BS-L-3545-31
35	45	80	6	Satin	BS-L-3545-51
40	40	80	6	Brass	BS-L-4040-31
40	40	80	6	Satin	BS-L-4040-51
40	45	85	6	Brass	BS-L-4045-31
40	45	85	6	Satin	BS-L-4045-51
40	50	90	6	Brass	BS-L-4050-31
40	50	90	6	Satin	BS-L-4050-51
40	55	95	6	Brass	BS-L-4055-31
40	55	95	6	Satin	BS-L-4055-51
40	60	100	6	Brass	BS-L-4060-31
40	60	100	6	Satin	BS-L-4060-51
45	45	90	6	Brass	BS-L-4545-31
45	45	90	6	Satin	BS-L-4545-51
45	50	95	6	Brass	BS-L-4550-31
45	50	95	6	Satin	BS-L-4550-51
45	55	100	6	Brass	BS-L-4555-31
45	55	100	6	Satin	BS-L-4555-51
50	50	100	6	Brass	BS-L-5050-31
50	50	100	6	Satin	BS-L-5050-51

Double Thumbturn

Dimensions			No. of Pins	Finish	Part No.
A	B	C			

35	35	70	6	Brass	BS-L-T3535-31
35	35	70	6	Satin	BS-L-T3535-51
35	40	75	6	Brass	BS-L-T3540-31
35	40	75	6	Satin	BS-L-T3540-51
35	45	80	6	Brass	BS-L-T3545-31
35	45	80	6	Satin	BS-L-T3545-51
40	40	80	6	Brass	BS-L-T4040-31
40	40	80	6	Satin	BS-L-T4040-51
40	50	90	6	Brass	BS-L-T4050-31
40	50	90	6	Satin	BS-L-T4050-51
45	45	90	6	Brass	BS-L-T4545-31
45	45	90	6	Satin	BS-L-T4545-51
45	55	100	6	Brass	BS-L-T4555-31
45	55	100	6	Satin	BS-L-T4555-51


Further sizes may be available - please contact the sales office for further information. Oval Profile Cylinders are also available. Retail Boxed versions available on certain products.

Classification


The Anti Bump cylinder has been approved to BS EN 1303:2015 and carries the following classification:

Category	1	2	3	4	5	6	7	8
Classification	1	6	0	0	0	C	5	2


BS Single Euro Profile Cylinder

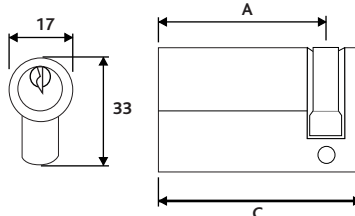

BS Double Euro Profile Cylinder

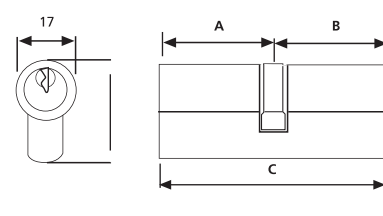

BS Double Euro Profile Thumbturn Cylinder

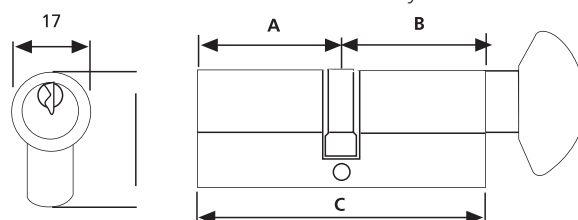

All dimensions are in mm and are nominal.
ERA reserves the right to change specification without notice.
It is the responsibility of the door manufacturer to ensure that the finished product meets any required safety and performance specification.

Technical Information

Corrosion resistance

Meets the requirements of BS EN 1670:2007 Grade 3

Operation

Endurance tested in excess of 100,000 cycles

Performance (Excluding Thumbturn)

Independently tested to meet the requirements of BS EN 1303:2015 and accredited to TS007-1:2014+A2:2018 1*. BSI Kitemark License No. 553031. Designed to meet the requirements of PAS 24 in a compliant door set.

Material Specification

Cylinder:	Brass
Cam:	Sintered Steel
Pins:	6 Hardened pins, anti bump anti pick, anti-drill
Key:	Nickel plated brass
Screw:	M5 x 50mm and M5 x 60mm nickel plates or polished brass screw
Finish:	Brass (natural), Satin plated brass

Packaging

Anti Bump Cylinder

1 cylinder per box, 10 per outer box

Maintenance

Wipe the surface periodically with a soft cloth to remove excess grease or moisture.