

StrongBOLT

210V

Oval profile cylinder Deadlock



Application:

- For timber doors hinged on the left or right
- Suitable for doors up to 54mm thick
- For use with an oval profile cylinder

Specification:

New features

- Radius plastic **splinter guard** for easy installation and a professional finish
- Anti-saw security features for resistance against attack
- Chamfered bolt design increases the performance of the lock under side load testing.
- Radius inner forend for ease of installation
- Deadbolt locked or unlocked by the key from either side
- 12.5mm deadbolt for secure positive deadlocking
- Can be installed in the many UK mortices without the need for additional carpentry or spoiling the edge of the door
- Hardened steel pins provide resistance to attack from sawing

- Case Size: 67mm (2.5") or 79.5mm (3")
- Backset: 45mm or 57mm
- Case: Steel, red powder coat
- Forend: Stainless steel or brass
- Striking Plate: Finished to match forend
- Faceplate: Supplied with square faceplate which covers a radius inner forend
- Deadbolt: Brass with hardened steel rollers
- Latch Bolt: Zinc
- Follower: n/a
- Rebate Kit: 2100REB 13mm (0.5")
- Suitable for use on 30 and 60 min fire doors
- Packaging: Individually boxed or Visipacked



Standards:

- Tested to BS EN 12209:2003

2	M	4	1	0	F	1	B	A	0	0
---	---	---	---	---	---	---	---	---	---	---

Intumescent kit J-STRONGBOLT-DL-IK suitable for 30 and 60 minute timber fire doors are available to order as a separate item



Finish:


- SS - Satin Stainless Steel
- PB - Polished Brass finish

StrongBOLT

210V

Oval profile cylinder Deadlock

Technical Design:

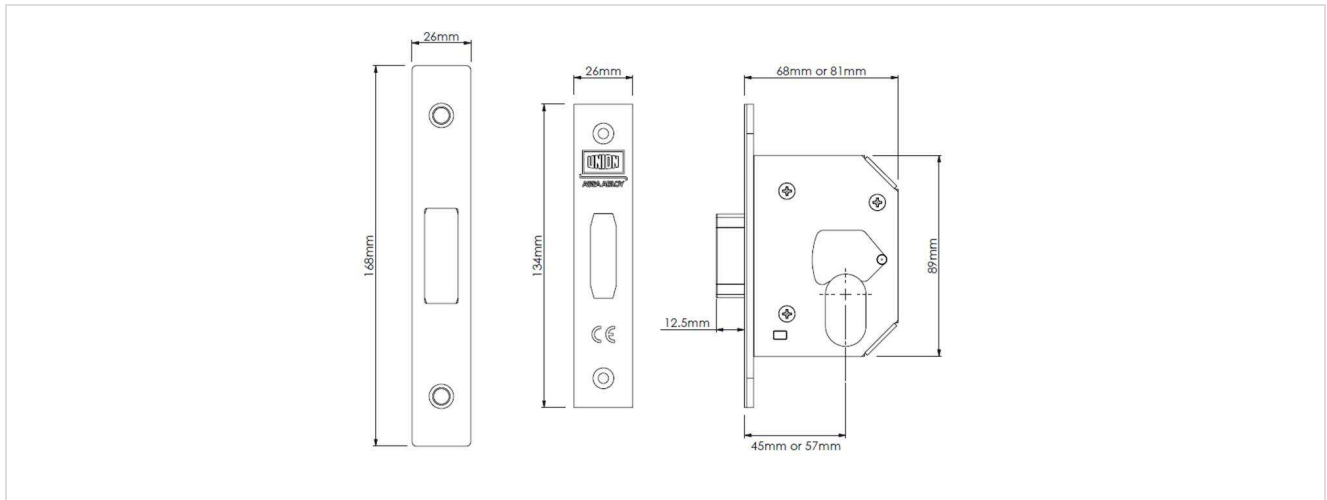

Variants:

Code	Description
JL21OVS-SS-2.5	S.BOLT OVAL PROF. CYL MORT. D.LOCK, SS, 2.5" CASE ONLY
JL21OVS-SS-3.0	S.BOLT OVAL PROF. CYL MORT. D.LOCK, SS, 3" CASE ONLY
JL21OVS-PB-2.5	S.BOLT OVAL PROF. CYL MORT. D.LOCK, PB, 2.5" CASE ONLY
JL21OVS-PB-3.0	S.BOLT OVAL PROF. CYL MORT. D.LOCK, PB, 3" CASE ONLY