



Light reinforced angle brackets are used to assemble small structural joinery for internal and external applications.

FEATURES





Material

- Pre-galvanised mild steel.

Benefits

- Multiple applications.



APPLICATIONS

Header member



- **Supporting member:** solid wood, composite lumber, glued-laminated wood, triangular trusses, profiles, etc.
- **Supported member:** wood, concrete, steel, etc.

For Use With

- Interior fittings.
- Furniture.
- Small frames, etc.

TECHNICAL DATA

Product Dimensions

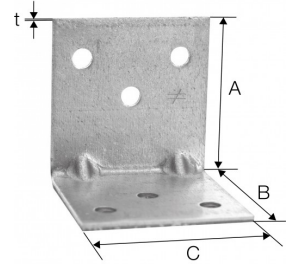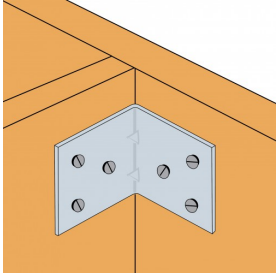

	EA444/2C50
	EA554/2C50
	EA664/2C50
	EA756/2C50

INSTALLATION

Fixing

On wood:

- 3.75 x 30mm square twist nail.
- CNA annular ring-shank nails 4.0 mm.
- CSA screw 5.0 mm.

On concrete:


- HIPC 6-40/10 drive anchors or HIPC 8-60/20.

On metal:

- Bolts.
- HR bolts.
- Rivets, etc.

Installation

Use specified fasteners.

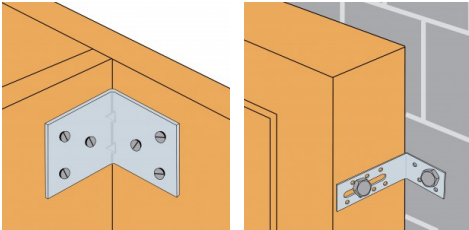

Wood to wood
connection.

Timber to
masonry
connection