TS.11204

DESIGNER RANGE
Slide Arm Closer

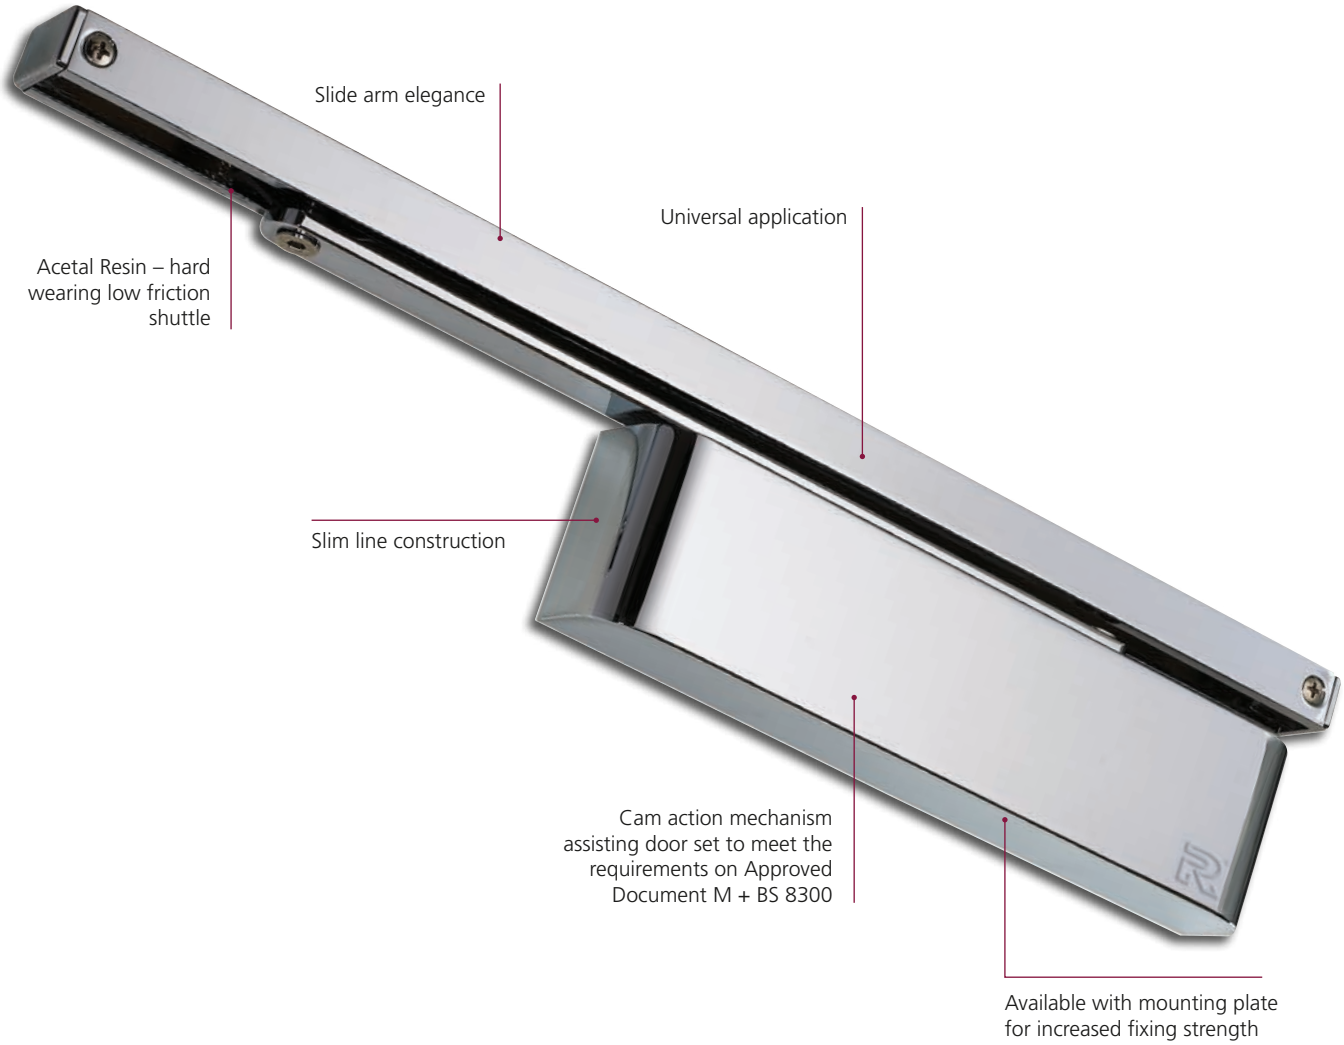

Silver (SE)

Satin Nickel Plate (SNP)

Polished Nickel Plate (PNP)

Electro Brass (PVD)

Antique Brass (AB)

Product Overview

- ✔ Renown for its High Efficiency & Ease of Opening
- ✔ Tested to power size EN2-4
- ✔ Assists Document M and BS 8300
- ✔ Slimline Construction with Slide arm elegance
- ✔ Universal Application
- ✔ Temperature stable hydraulic oil – used between -30°C - +60°C
- ✔ Easy to read instructions, saving over 12 minutes of fitting time

CE

#DesignerDoorClosersthatLast

Specification Overview

Fire Tested up to 60 mins

Max Door Weight up to 80kg

Opening Angle 110°

Max Door Width 1100mm

Universal Application

Adjustable Closing Speed

Power Size EN2-4

Adjustable Latch Speed

Guarantee

11204CPR01.07.13

Min Door 857mm fig30

Rut Lock

All dimensions shown are in mm.

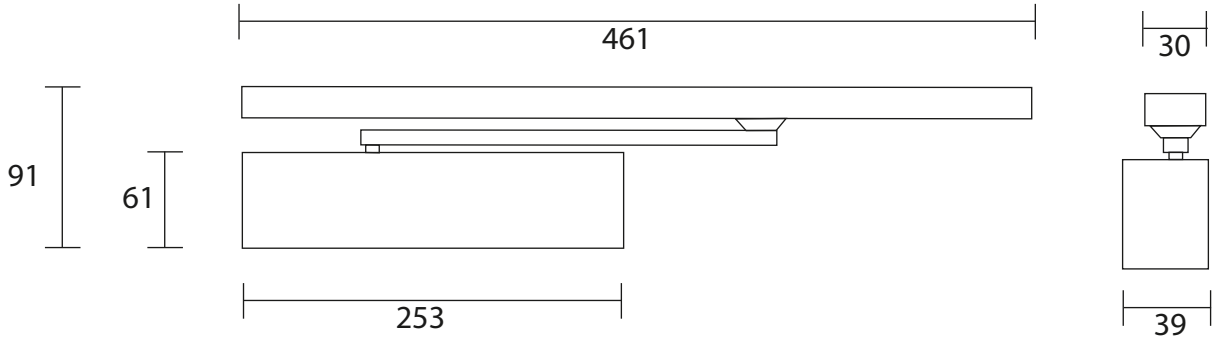

Technical Information

BS EN 1154 Classification

TS.11204 door closers have been independently tested to conform with the EN 1154 performance standard. They are CE marked and classified as follows:

3	8	2/4	1	1	3

BS EN 1634 Fire Test

TS.11204 door closers have been tested to EN 1634 Fire Pressure Test for, 30 and 60 minutes on a TFTDoor and TFCDoor.

ADA Compliant

Fire doors shall have a minimum opening force allowable by the appropriate administration authority, and doors other than fire doors 5 pounds maximum opening force (22.2N) from push or pull side.

Options

- Mechanical hold open slide rail (*Not to be used on fire doors)*
- Back check availble as a cushion stop in the rail

Options not covered by CE.

Other Benefits

- BS8300 & ADA.cv door closer helping the less able (min door size 857mm)